


**A-21-X Flat Tie**

Dayton/Richmond A-21-X Flat Tie is used with the A-51 Wedge Bolt to secure and space modular forms. A-21-X ties are available in 6" through 24" in 1/2" increments. The wall thickness is stamped on each tie. Standard breakback is 1/4". **In Stock : 6", 8", 10", 12", and 16".**

**A-46 Loop Panel Tie**

Dayton/Richmond A-46 Loop Panel Ties are designed for securing and spacing modular type forms. Standard units are fabricated with 2-1/8" ends and 1" breakback. Other breakbacks, plastic cones or waterseal washers are available by special order. When erecting modular type forms, the A-46 ties are placed in the slots between the form panel. An A-51 Wedge Bolt is placed through the adjoining form and into the loop of each tie. A second wedge bolt is then placed through the slot of the first wedge bolt to secure the tie and form together. **In Stock : 8", 10", 12", 14" and 16".**

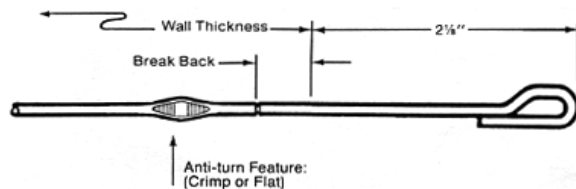


**A-51 Wedge Bolt**

Dayton/Richmond A-51 Wedge Bolt is used with A-46 Loop Panel Ties, A-45 Base Ties and B-21 Plylags to secure modular type forms.



**A-16 Omni Wedge**

Dayton/Richmond A-16 Omni Wedge is a high strength snap tie wedge designed to slip over the head of standard or heavy duty snap ties to provide ample bearing area for proper load distribution into the wales.

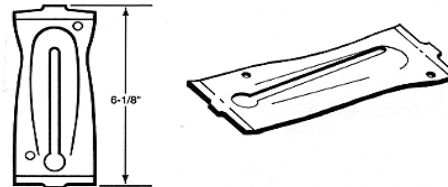

**A-3 Standard Snap Tie**

Dayton/Richmond A-3 Standard Snap Ties are manufactured with either hot or cold forged integral heads. A-3 snap ties have a nominal 1" breakback with 1/4" and 1/2" breakbacks available on special order. Breakbacks over 1" can be provided on special order, but due to the increased concrete bond Dayton/Richmond cannot guarantee that the ties will consistently provide proper breakback. **In Stock : 6", 8", 10", 12" (cone or washer), 14", 16" (washer only), 24" (cone only).**

